

SPEED CONTROLLERS FOR EC MOTORS

Speed controller
R-1/010



■ **Applications**

Applied for smooth speed control of EC motors with the control input 0-10 V.

imum possible value and includes the maximum possible values.

■ **Design and control**

The controller casing is made of plastic. Switching ON/OFF is effected by means of control knob rotation. The control range starts from the mini-


■ **Mounting**

The controller is designed for indoor mounting into special surface mounting (MKN-3) or flush mounting (MKV-4) junction box (under separate order) or into standard round electric junction boxes.

Technical data:


	R-1/010
Voltage [V]	10-48VDC
Control signal [V]	0-10
Maximum current [mA]	5mA
Overall dimensions LxWxH [mm]	78x78x63
Maximum ambient temperature [°C]	35
Protection rating	IP 40
Weight [kg]	0.12

Designation key:
V - fan;
R - controller R-1/010

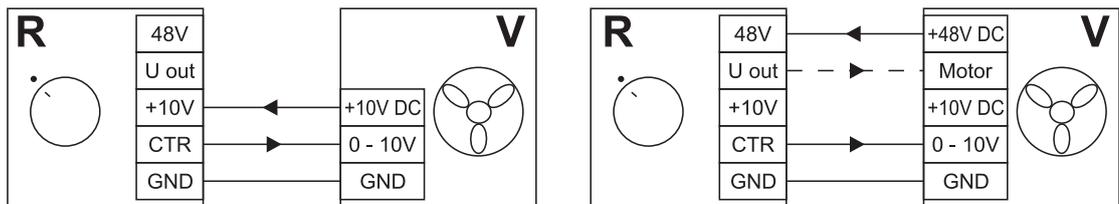

Controller wiring diagram

MOUNTING JUNCTION BOX

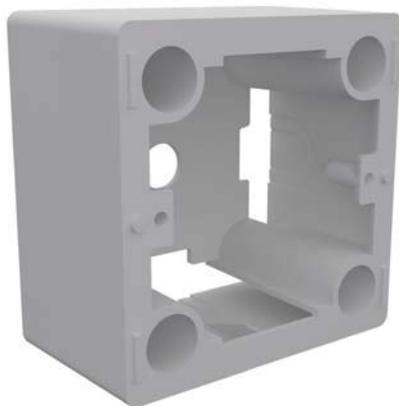

MKN-3 (for surface mounting)



MKV-4 (for flush mounting)